




# XLOO

## USER MANUAL



## XLOO DELUX TOILET SEAT & BRUSH



XLOO TOILET SEAT DELUX / TOILER BRUSH DELUX

2 X BATTERY / CHARGER / USB CABLE / USER MANUAL



ONE OF A KIND  
PATENTED TECHNOLOGY



### NON TOXIC

Stop buying highly toxic air fresheners that pollute the bathroom air and cause serious damage to your health

### BANISH FOUL ODOURS

The patented technology eliminates foul odours instantly and expels fresh purified air

### SAVE MONEY

Save money over time by not needing to buy air fresheners or aerosols every again


### BATTERY POWERED

Powered by direct power plug or by a rechargeable batteries lasting up to 30 days

# Content

ITEMS & COMPONENTS	Pg 3
HOW IT WORKS	Pg 4
SAFETY INSTRUCTION	Pg 5
PRODUCT & PACKAGING DIMENSIONS	Pg 6
INSTALLING THE SEAT	Pg 7
BATTERY INSTRUCTIONS	Pg 8
TROUBLESHOOTING	Pg 9
CERTIFICATIONS	Pg 10
THANK YOU FOR CHOOSING XLOO	Pg 11

# Items & Components

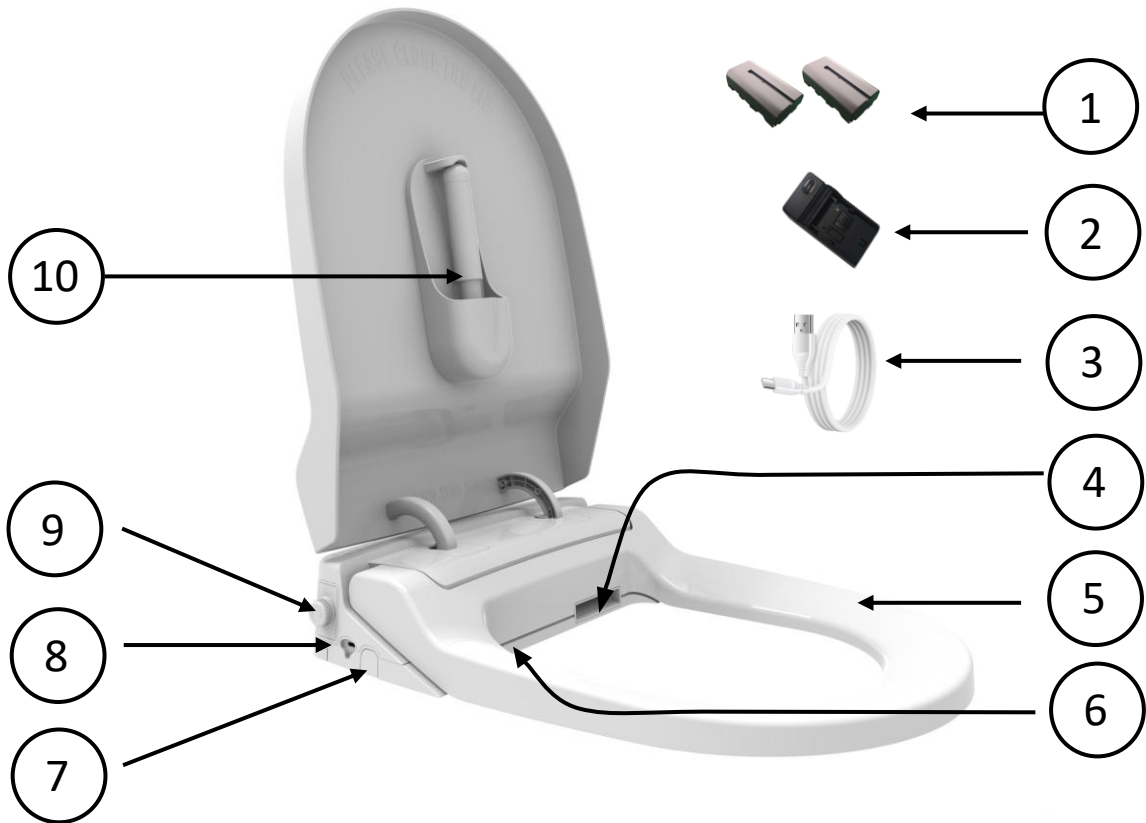

Item	Component
1	2 x Battery Pack
2	Battery Charger
3	Power Cable
4	Fresh Air Outlet
5	Activation Sensor
6	Foul Air Inlet
7	Fixing Plate Release Button
8	Power Cable Input
9	Battery Compartment
10	XLOO Toilet Brush

# How it works



- The patented technology activated when the user sits on the toilet seat.
- An extractor fan will activate after 3 seconds of sitting on the seat. Thereby pulling in the foul odours and passing the ozone generators, finally expelling fresh air from the fresh air outlet into the bowl.
- The air purification will work 1 minute when the user is seated, and stop for 10 seconds before continue for another 1 minute and repeated this cycle whilst the user is sat.
- The product is fully automatic there is no need to activate manually.
- **PLEASE CLOSE THE LID** after the user stands up it is important to close the toilet lid for maximum air purification effect.



# Safety Instructions

WARNING: Close the lid after use to avoid excess ozone expulsion into air.

WARNING: Do not put your face near the toilet bowl when the fan and ozone generator is active.

WARNING: Remove the batteries when taking off the seat to clean or put in storage.

WARNING: If the product is not operating as stated on page 4 of this manual, immediately stop use and contact [info@xloo.org](mailto:info@xloo.org)

WARNING: Always have the machine serviced by a professional, qualified representative. Never attempt to service the machine or access its internal components as it will result in breach of warranty.

WARNING: Read and understand all instructions. Failure to follow all instructions listed in this User Manual may result in damage of the product.

WARNING: To prevent damage to the product, read the following safety precautions in their entirety before using this equipment.

WARNING: Only use the supplied battery and charger with the machine to avoid risk of fire.

WARNING: Do not store the battery where any electrically conductive material is close to the terminal.

**PLEASE USE THE PRODUCT AS INSTRUCTED AND FOLLOW THE SAFETY INSTRUCTIONS AS STATED.**

# Dimensions

## Product

Length 49cm

Width 37cm

Height 8cm



## Packaging

Length 55cm

Width 41cm


Height 11cm




Note: For bulk orders the packaging can be packaged in a customized shipping carton at request.

# Installing the Seat

1

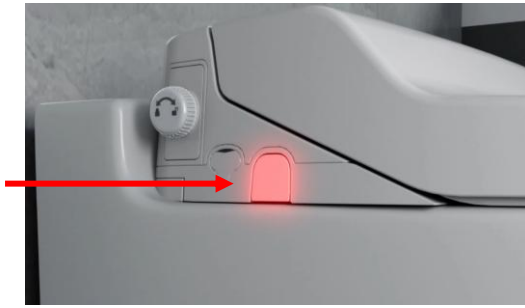

2

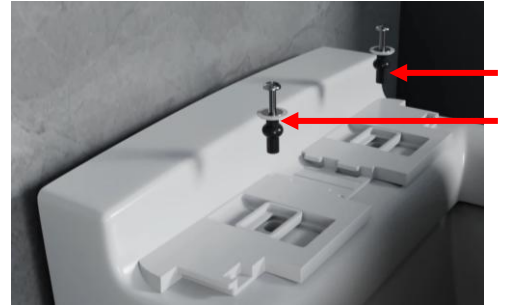

3



- 1 Push the clips on either side of the back housing to remove the fixing plate.
- 2 Place the fixing plate in the desired position to line up with the holes at the back of the toilet bowl and attach with the nuts and bolts provided.
- 3 Ensure the fixing plate is secured tight to the toilet bowl and slide the toilet seat onto the fixing plate until it locks in place.

# Power Instructions



Charge the batteries for 4 hours before first using the product

- 1) Twist the lock anti-clockwise to allow the battery cover to open.
- 2) Insert 1 of the batteries provided with the battery terminals facing inwards.
- 3) Attach the battery cover and twist the lock clockwise to lock it in place.
- 4) Use the charger provided to charge the batteries for 4 hours to fully charge.
- 5) Plug the USB Type-C Charging cable into the charging port next to the battery compartment to charge the battery inside the product or power the product without a battery.

Note: The product requires a 7.2v 3200mAh battery to function. Charge the battery before first use.

# Troubleshooting

## **Q. When I sit down the fan doesn't activate.**

- A1. Change the battery with a fully charged battery and try again, the battery could be low on power.
- A2. Remove the battery and insert again to do a system restart.
- A3. Lift the seat and clean the face of the control hosing and try again.
- A4. Try powering the product with the power cable only.
- A5. If the problem consists contact our service team for assistance.

## **Q. The fan is active but no air is blowing out.**

- A1. Check there is not anything obstructing the air intake under the seat.
- A2. Check there is not anything obstructing the air outlet under the seat.
- A3. Remove the battery and unplug the product, to do a system restart.
- A4. If the problem consists contact our service team for assistance.

## **Q. The air blowing out is not fresh.**

- A1. Remove the battery and unplug the product, to do a system restart.
- A2. If the problem consists contact our service team for assistance.

To contact our service team for assistance please email us at [Info@Xloo.org](mailto:Info@Xloo.org) and we will get back to you within 48 hours.

# Certifications

This product has been certified under the following certifications:



For further information on certifications or to inquire about certifications for your country or region please contact XLOO Limited at [info@xloo.org](mailto:info@xloo.org).

# Thank You for choosing XLOO

For more information on XLOO LIMITED products please visit our website at [www.xloo.org](http://www.xloo.org) or contact us via email at [info@xloo.org](mailto:info@xloo.org)





XLOO LIMITED – [www.xloo.org](http://www.xloo.org) – [info@xloo.org](mailto:info@xloo.org)

Follow XLOO on all social media platforms  
by searching XLOO

